

# IWATSU

## Soft magnetic materials' property tests



SY-8218 10Hz to 10MHz  
SY-8219 10Hz to 1MHz

**Highly accurate  
automatic measurement  
at high frequency**

## B-H analyzer

### Wide temperature range scanner system SY-330



### Scanner system SY-321A/320A



### DC bias test system SY-960, 961, 962



### Single sheet test system SY-956



## Precise magnetic property measurement at high frequencies

### Precise and accurate core loss measurement





Iwatsu's B-H analyzers which hiring CROSS-POWER method (IEC62044-3) enable precise and highly accurate measurement embedded minimized phase error integration on frequency spectrum with current detecting resistors and compensation on detecting circuit with full compensation on amplitude and phase characteristics. Third generation models are available now to contribute leading-edge development on future power management.



- Wide band frequency range from 10Hz to 10MHz (SY-8218)
- 41pcs., max. specimen for temperature range of -30°C to 150°C automatic scanner system (SY-321A)
- Voltage :  $\pm 140V$ , max. / Current :  $\pm 5.2A$ , max. DC to 3MHz High power amplifier (IE-1125B)
- 36mm(L),min. 35mm(W),max. single sheet test (SY-956)
- DC30A, max. DC-bias superposition test (SY-960, 961, 962)


|   |   |  |
|---|---|--|
| <p>B-H analyzer</p>  <p>SY-8218 / SY-8219</p>  | <p>Wide temperature scanner</p> <p>Autovehicle standard:<br/>AEC-QA200 Grade0</p>  <p>SY-330</p> | <p>Temp. scanner system</p>  <p>SY-320A / SY-321A</p>                 |
| <p>DC biasing system</p> <p>AC blocker SY-962</p>  <p>DC bias source SY-961</p> <p>DC bias tester SY-960</p> | <p>Single sheet tester</p>  <p>SY-956</p>  | <p>Amplifier</p>  <p>HSA4101-IW</p> <p>HSA4014-IW</p> <p>IE-1125B</p> |

## Various types of soft magnetic material property test
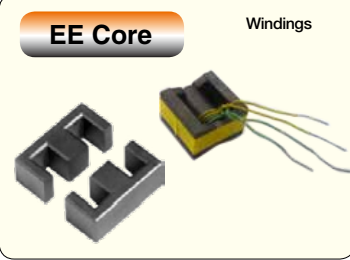
|   |  |  |  |
|---|--|--|--|
| <b>Soft Materials</b><br>Ferrite<br>Permalloy<br>Amorphous<br>Si steel sheet<br>Powder Core | <b>Shape</b><br>Troidal<br>EE core<br>EI core<br>Sheet<br>Powder | <b>Troidal</b><br>Windings<br> | <b>Powder</b><br>SY-513<br> |
|   |  | <b>EE Core</b><br>Windings<br> | <b>Sheet</b><br>            |

## Fully automatic test

Sample parameters (Le: magnetic pass, Ae: cross section, N1 and N2, etc.) and test conditions(Frequency, Hm, Bm, V2m or I1m) inputs enable obtaining BH hysteresis curve and magnetic properties in value automatically.

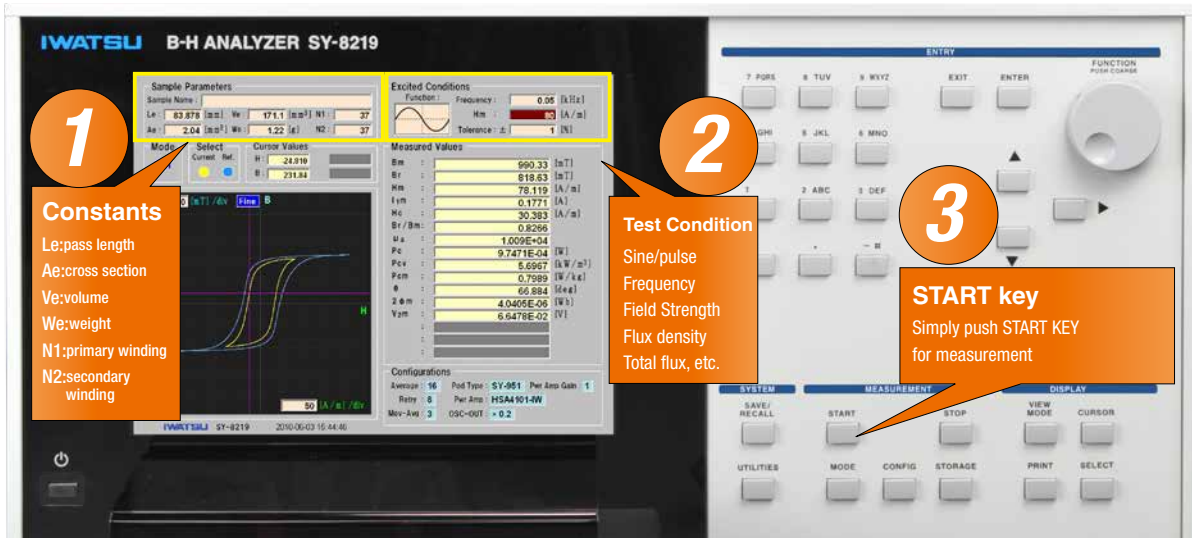

## Fully automatic test with options

SY-810 Remote control software is Temperature scanner system, Single sheet test system and DC biasing system.

Schedule menu

Condition menu

Semi-manual menu

Auto test menu


# Precise test in higher frequency

## B-H Analyzers

**SY-8218** 10Hz ~ 10MHz

**SY-8219** 10Hz ~ 1MHz

- Test Freq. 10Hz to 10MHz(SY-8218), 10Hz to 1MHz(SY-8219)
- Signal waveform SINE or PULSE(10Hz to 1MHz)
- Max. Input current ±6A
- Max. Input voltage ±200V
- Excitation method Automatic excitation (Target : Hm, Bm, I1m or V2m)  
Automatically degaussing after excitation to avoid magnetization

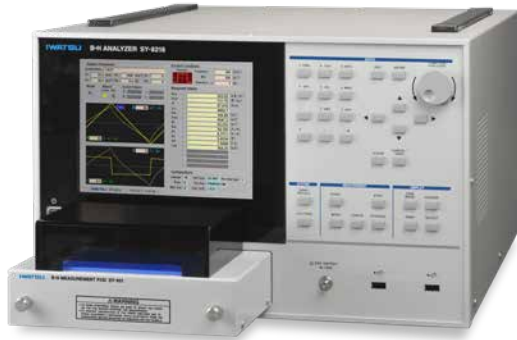

SY-8218



[Test example]  
Measurement POD  
(without POD cover)

|                           |   |   |
|---------------------------|---|---|
| Measurement method        | CROSS-POWER method (Compatible to IEC62044-3 standard)  |   |
| Measurement item (Symbol) | Max. Magnetic flux density(Bm), Residual magnetic flux density(Br), Max. Magnetic field strength(Hm), Coersive force(Hc), Rectangular ratio(Br/Bm), Relative amplitude permeability( $\mu_a$ ), Core loss(Pc,Pcv,Pcm), Primary excitation current(I1m), Secondary induced voltage(V2m), Phase( $\theta$ ), Total magnetic flux linkage( $2\phi_m$ ), Apparent power(VA), Impedance permeability( $\mu_z$ ), Complex permeability( $\mu', \mu''$ ), Loss coefficient( $\tan \delta$ ), Inductance(L), Resistance(R), Impedance(Z), Quality factor(Q), Total harmonic distortion(THD) |   |
| Waveform display          | B-H curve, Primary current, Secondary voltage, Magnetic field, Flux density   |   |
| Test Frequency            | SINE  | 10Hz~10MHz(SY-8218), 10Hz~1MHz(SY-8219) |
|                           | PULSE   | 10Hz~1MHz(Duty50% fixed)                |
| Magnetic field detection  | Voltage detection on non-inductive shunt, max. current at ±6A   |   |
| Flux density detection    | Voltage at detection coil, max voltage at ±200V   |   |
| Desitizer                 | Resolution : 16bits (8192points/cycle)  |   |
| Coil method               | Two winding method or single winding method selectable  |   |
| Display                   | 8.4 inch TFT-LCD SVGA 800 x 600pixel  |   |
| Weight, Dimensions        | Approx. 12.5kg, Approx. 420W x 266H x 480D(mm)  |   |
| External output           | USB(storage)  |   |
| Accessories               | POD cover, SY-504 : AC coupler, Power amplifier cable (BNC-BNC), OSC Cable(BNC-SMA), Power cable, Users guide, Instruction manual(CD-ROM)   |   |

## Power amplifiers


### Wide frequency bandwidth and high power bipolar amplifiers

#### Power amplifier for B-H Analyzer

HSA4101-IW 10MHz 1.0A 71V

HSA4014-IW 1MHz 5.6A 75V

IE-1125B 3MHz 5.2A 140V





HSA4101-IW

HSA4014-IW

IE-1125B

|                     | HSA4101-IW                          | HSA4014-IW                         | IE-1125B  |            |
|---------------------|-------------------------------------|------------------------------------|---|------------|
| Frequency bandwidth | DC~10MHz                            | DC~1MHz                            | DC~3MHz   |            |
| Max. current output | ±1Apeak                             | ±5.6Apeak                          | ±5.2Apeak   |            |
| Max. voltage output | ±71Vpeak                            | ±75Vpeak                           | ±140Vpeak   |            |
| Max. output power   | 50VA                                | 200VA                              | 350VA   |            |
| AC                  | Frequency                           | 50/60Hz                            | 50/60Hz   |            |
|                     | Voltage range                       | AC100V/115V<br>AC200V/230V         | AC90V~110V<br>*Options<br>(AC120V/200V/220V/240V) | AC90V~250V |
|                     | Max. Power                          | 700VA(400W)                        | 900VA(700W)                                       | 2kVA       |
| Size(mm), weight    | 220W x 177H x 450D<br>Approx. 7.8kg | 290W x 177H x 450D<br>Approx. 18kg | 440W x 238H x 600D<br>Approx. 29kg                |            |

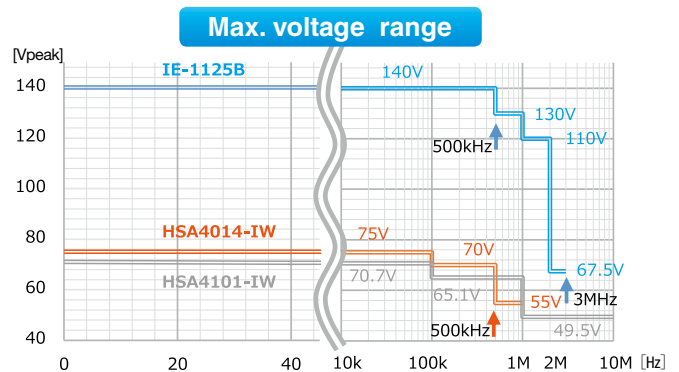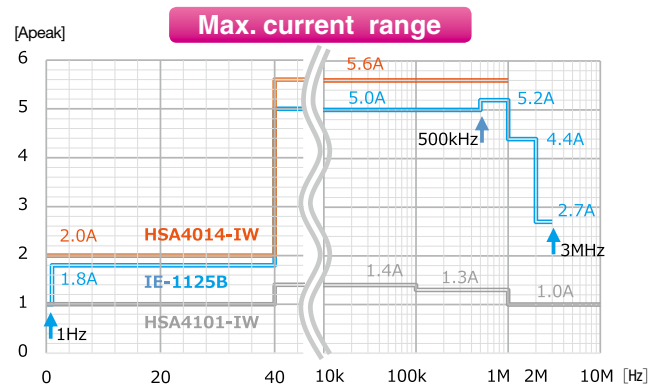

# Wide temp. range scanner SY-330, Scanner system SY-320A / 321A

Temp. range from  $-55^{\circ}\text{C}$  to  $+180^{\circ}\text{C}$   
 Large size samples : max. 4pcs.

## Wide temperature scanner

**SY-330** 4pcs.


Autovehicle std. AEC-Q200 Grade0 compatible



Temp. range from  $-30^{\circ}\text{C}$  to  $+150^{\circ}\text{C}$   
 Automatic test for max. 41pcs. samples

## Temperature scanner system

**SY-320A** 20pcs. / **SY-321A** 41pcs.

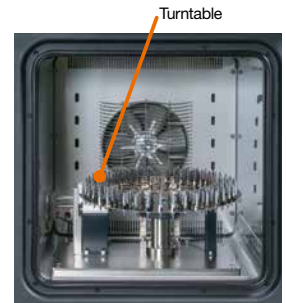

|                  |                 | SY-330  |
|------------------|-----------------|---|
| Chamber          | Power supply    | AC200V 3 $\phi$ 3W 50/60Hz  |
|                  | Max. current    | 14A, max.   |
|                  | Temp. range     | $-55^{\circ}\text{C}\sim+180^{\circ}\text{C}$                                 |
| Scanner Unit     | Power supply    | AC 100V to AC240V 50/60Hz   |
|                  | Max. power      | 21VA, max.  |
|                  | Frequency range | 10Hz~3MHz(SY-8218)<br>10Hz~1MHz(SY-8219)                                      |
|                  | Sample          | 4pcs., max.   |
|                  | Max. current    | $\pm 6\text{A}$   |
|                  | Max. voltage    | $\pm 200\text{V}$   |
| Size(mm), Weight |                 | 1,023W x 607L x 1,200H, Approx. 190kg   |
| Accessories      |                 | Chamber cable(SY-912), RS232C cable, Pushing jig(SY-512), Power cable, Manual |

**Options**

**GPIO I/F**

Model **NI GPIB-USB-HS+**

※ NATIONAL INSTRUMENTS Corp.

**Serial I/F**


Model **NI USB-232**

※ NATIONAL INSTRUMENTS Corp.


|                  |                 | SY-320A  | SY-321A                             |
|------------------|-----------------|--|-------------------------------------|
| Chamber          | Power supply    | AC100V 50/60Hz   |                                     |
|                  | Max. current    | 12.5A, max.  | 21.0A, max.                         |
|                  | Temp. range     | $-30^{\circ}\text{C}\sim+150^{\circ}\text{C}$  |                                     |
| Scanner Unit     | Power supply    | AC 100V to AC120V 50/60Hz  |                                     |
|                  | Max. power      | 28VA, max.   |                                     |
|                  | Frequency range | 10Hz~5MHz(SY-8218)<br>10Hz~1MHz(SY-8219)   |                                     |
|                  | Sample          | 20pcs., max.   | 41pcs., max.                        |
|                  | Max. current    | $\pm 6\text{A}$  |                                     |
|                  | Max. voltage    | $\pm 200\text{V}$  |                                     |
| Size(mm), Weight |                 | 543W x 695L x 620H<br>Approx. 85kg   | 640W x 920L x 660H<br>Approx. 135kg |
| Accessories      |                 | Chamber cable(SY-910), GPIB cable(1m), Power cable, Instruction manual, Turntable SY-510 (for SY-320A) or Turntable SY-511 (for SY-321A) |                                     |

### Remote control system configuration

#### Remote control system with Wide temp. range scanner : SY-330

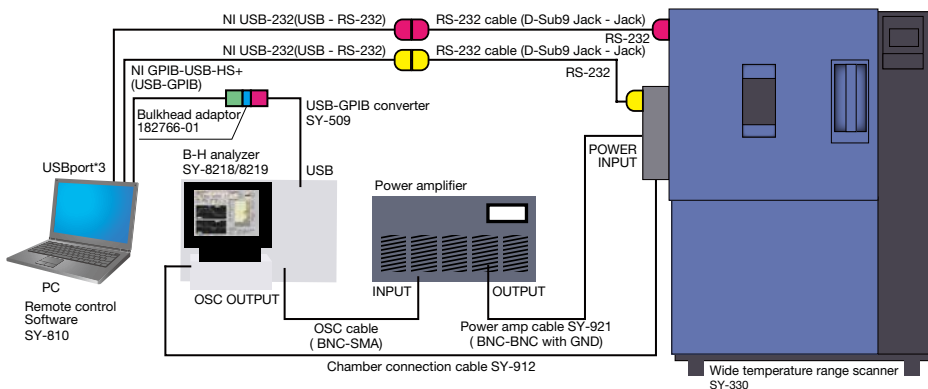


#### Remote control system with scanner system : SY-320A / SY-321A

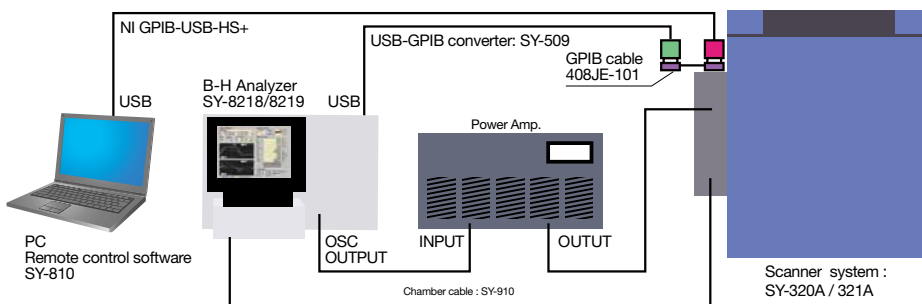

### Remote control software : SY-810

※ See page8 for details

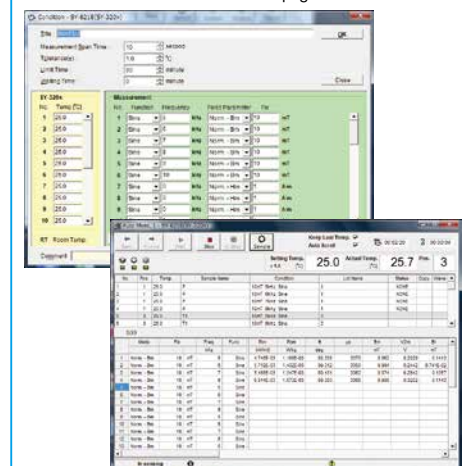

### Optional consumable parts (for SY-320A/321A)

Spare turntable(for setting samples)  
 SY-510 (for SY-320A)  
 SY-511 (for SY-321A)



Spare contact pin set  
 SY-512 (for SY-320A/321A)



## AC BH analysis on single sheet / ribbon

### Single sheet test system SY-956



- Test frequency : 10Hz to 20kHz
- Max. Magnetic field strength : 10,000A/m
- Sample size : 36mm(L) or longer, 35mm(W)max., 3mm(Thickness)max.
- Vertical single yoke test method
- Core loss in yoke cancelling compensation (Patent pending : No. 5885646)
- Controlable pressing pressure on specimen for test reproductivity

|                         |   |
|-------------------------|---|
| Test method             | Vertical single yoke single sheet magnetic property test method (IEC 60404-3 compatible)(with yoke core loss compensation)        |
| Max. Magnetic field     | Approx. 10,000A/m(with excitation current at 5A)  |
| Test frequency          | SINE : 10Hz to 20kHz  |
| Available sample size   | 36mm(L) or longer, 35mm(W)max., 3mm(Thickness) max.   |
| Max. excitation current | ±6A   |
| Max. voltage            | ±200V   |
| Power supply            | AC100V to AC240V, 50Hz/60Hz, 27VA max.  |
| Temp. range             | +18°C to +28°C for test specification guarantee   |
| Size(mm), Weight        | Approx. 330W x 200H x 320D, Approx. 8.5kg   |
| Accessories             | Connection cable(SY-957), B coil(2types), Terminal screws, Pincer, Blowing brush, Accessory case, Power cable, Instruction manual |




#### B coil for voltage detection

| Model       | B coil 01                                  | B coil 02                                   |
|-------------|--|---|
| Outer look  |  |   |
| Sample size | Max. 1mm(Thickness), Max. 10mm(W), 35turns | Max. 1mm(Thickness), Max. 30mm(W), 100turns |


※ B coil can be wound by customer for preferable turns.

Magnetic sheet can be varied of it's magnetic characteristics according to it's shape and before/after shaping process.

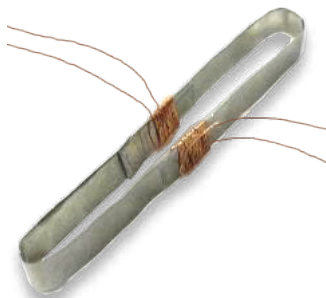

#### Example of Permalloy

|           |               |
|-----------|---------------|
| Hc        | Circle = Oval |
| Br        | Circle < Oval |
| Bs        | Circle < Oval |
| Core loss | Circle < Oval |

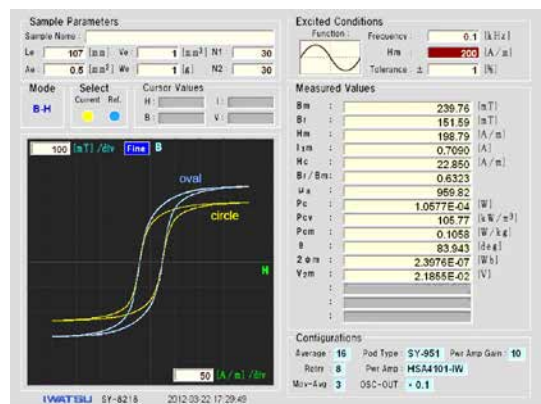

### LF AC coupler SY-514

Best to eliminate offset voltage of power amplifier  
SY-514 enables measurement with cut-off frequency at 300Hz while SY-504 (std. accessory) offers cut-off frequency at 10kHz.



BNC cable(0.6m)

Cut-off freq. : Approx. 300Hz, Max. input voltage : ±200V  
Max. input current : ±6A, BNC cable (0.6m/std. accessory)


### 10kHz AC coupler SY-504



※ Standard accessory for BH analyzer

### Troid shape case SY-513

Best for sheet troids and/or powder material measurement

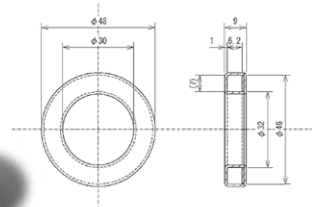

### DC bias power source SY-931


Max. DC current : 10A  
Max. Freq. : 1MHz




AC BH Analysis with DC biasing

DC bias tester  
SY-960,961,962

- Max. DC biasing 30A
- Max. AC ripple ±6A
- Test freq.(SINE) 10kHz~3MHz  
(Lowest frequency can be 10kHz or higher according to inductance value of specimen)
- Test freq. (PULSE) 10kHz~1MHz (Duty10%~90%)

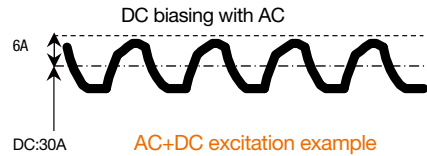



PULSE signal excitation (triangle signal current on specimen) or SINE+DC biasing excitation is available.

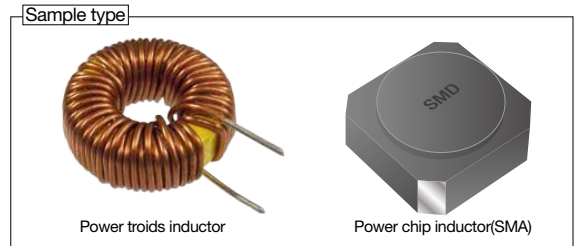







Example of chip inductor test (Chopper excitation)

Magnetic characteristics by increasing DC bias at fixed  $\Delta H$

DC bias vs  $\Delta P_c$

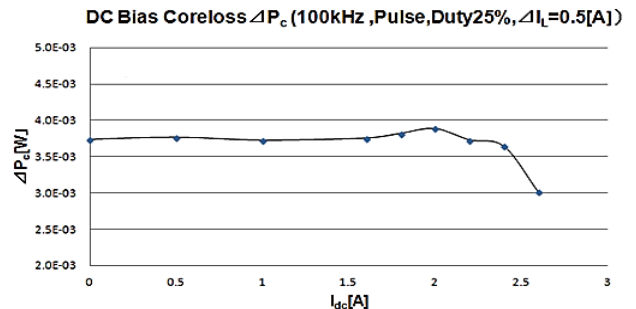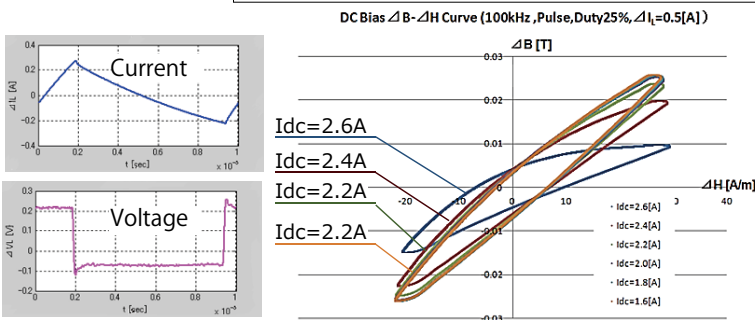

Examples of hysteresis curves of DC biasing. AC+DC excitation shows changes of hysteresis curve following DC bias level.

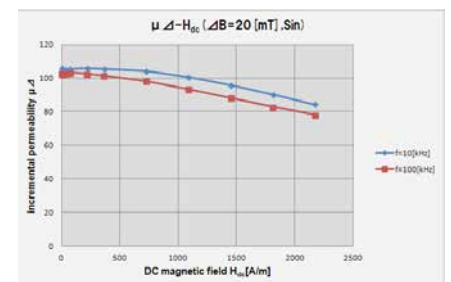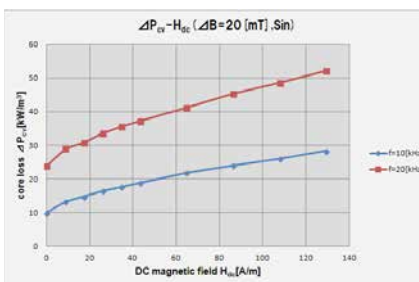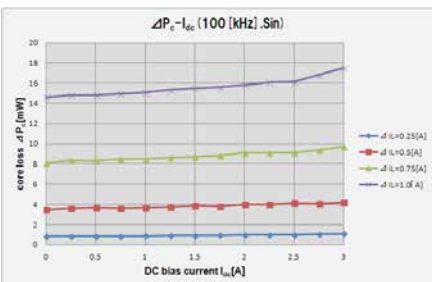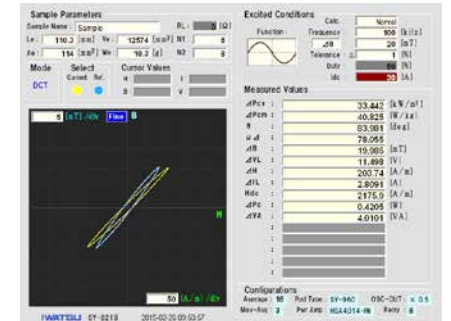
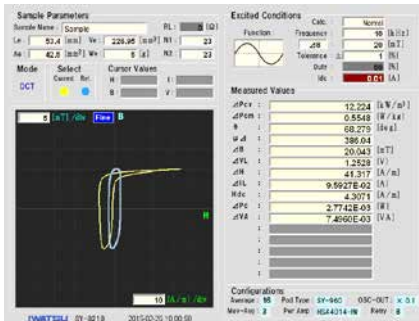
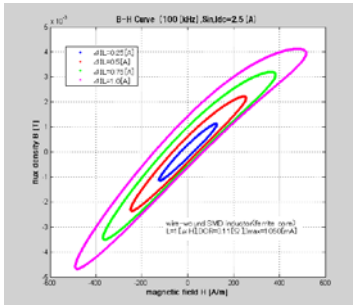


## Automation with various test conditions

# BH Analyzer remote control software for PC

## SY-810

- Temperature : 20kinds, Excitation : 40kinds of conditions can be set.
- Max. 800kinds of test conditions are available for each sample.
- Test data (waveform at CSV basis) and display hardcopy (JPEG, PNG) are available.
- SY-810 can control wide temp. range scanner(SY-330), scanner system(SY-320A/SY-321A), DC bias tester and single sheet test system for automatic tests.

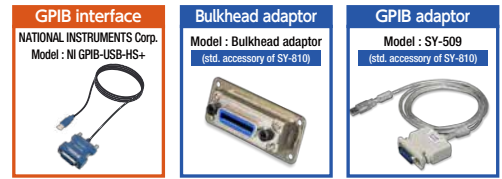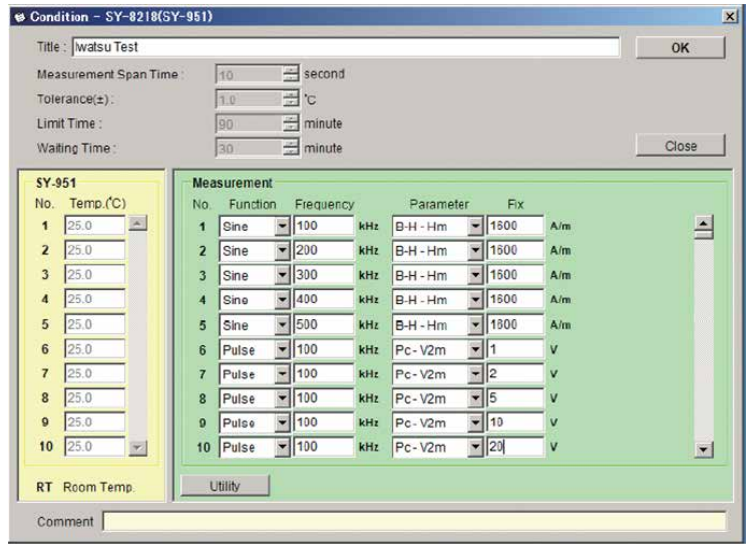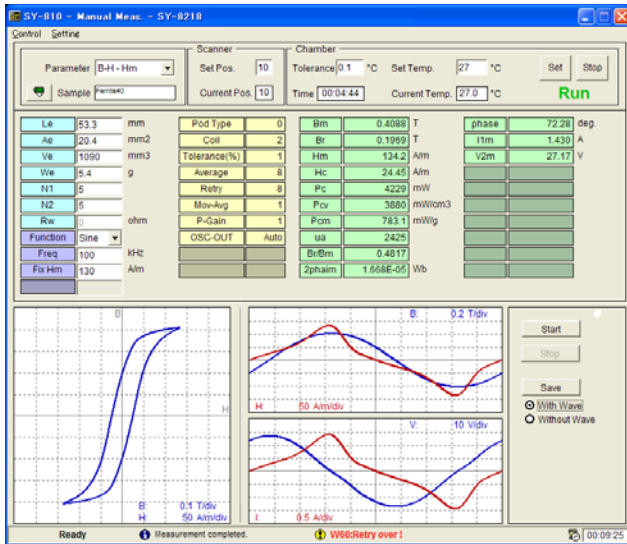

SY-810 contains CD (software & operation manual at PDF), GP-IB converter SY-509, Bulkhead adaptor 182766-01 and software license agreement OS: Windows Vista SP2, Windows7 32bit/64bit, Windows8 32bit/64bit, Windows10 32bit/64bit .NET Framework(packed), CPU Pentium133M or above, Memory at 64Mbyte or more, Display resolution at 1024x768 or above, USB port x3  
 ※ Contact our sales for the most recommended system configurations.  
 ※ NI GPIB-USB-HS+ (NATIONAL INSTRUMENTS) is required for PC interface with SY-8218/SY-8219. PC is not included with this system and supplied by customer.


## Built-in software function for BH Analyzer (Optional)

### Continuous test function SY-811

Time-tendency property test can be performed at continuous excitation.

- Test timeframe at 99,999minutes(Approx. 70days), max. 60second/test
- 2 kinds of properties can be monitored on display and extracted to memory.
- Measurement item can be changed during test.
- Comparison between Reference and test result on the same display.
- Test data at CSV and display hardcopy at JPG/PNG are available.

※ Built-in option for BH analyzer  
 ※ Implementation of SY-811 on BH analyzers(SY-8218/SY-8219) at the customer end will be returned to our factory for installation and inspection.

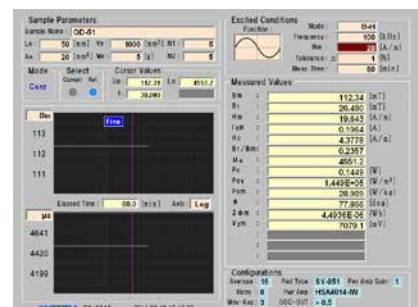

※ The products shown in this catalogue are current models at the date of publication. Design and specification are subject to change without notice for improvement.  
 ※ All enterprises including National Instruments and Microsoft, etc. and product names mentioned are trademarks or registered trademarks of the respective owners.  
 ※ Some of the products are Regulated Products subject to the ForeignExchange and Foreign Trade Control Law of Japan. Export should not be allowed without appropriate governmental authorization. Please ask our sales office whether the product concerned is a Regulated Product(s).